
FRANZ VIEGENER

Casablanca

installation



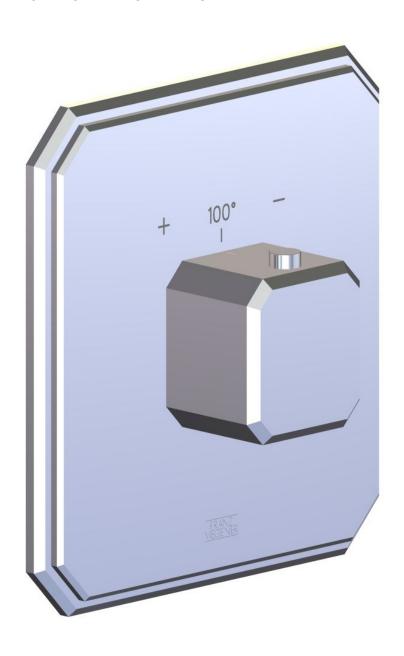


CONGRATULATIONS!

This product has been subjected to stringent test for its quality, performance and finish.

We guarantee years of trouble free operation.

We thank you choice and above all for the trust you are placing in us. This trust is what motivates us to improve every day.

Before connecting the faucet to the water supply, flush the tubing thoroughly to eliminate any residue.

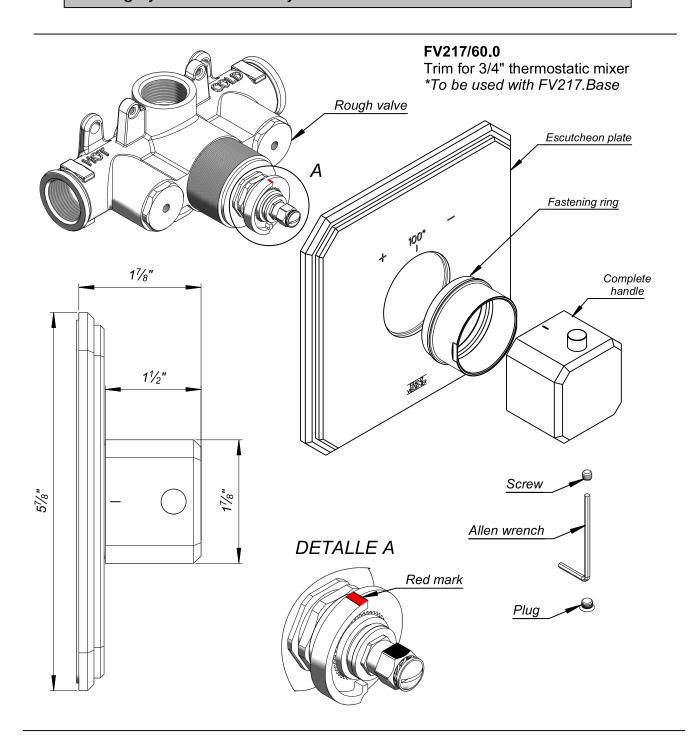




Calibrating the valve temperature


*The Valve comes calibrated from the factory to function at the correct temperature, however there are all sorts of circumstances that occur, such as water flow and pressure differences between the hot and cold side of your plumbing. These differences will cause the valve markings to read incorrectly.


To compensate for these differences you will need to make the following corrections.




you have connected to the thermostat valve.

Run the water onto a thermometer to determine the existing temperature.



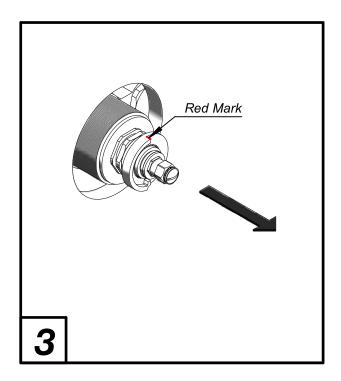

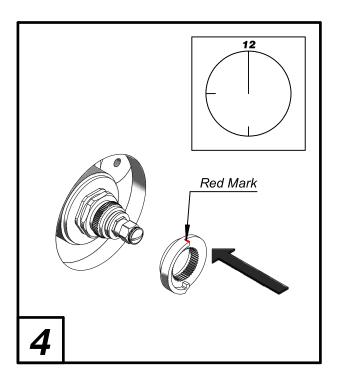



STEP THREE once you have the temperature set correctly, remove the plastic guide by pulling it towards you. You will notice a red mark on the guide. Reinstall the guide with the red mark pointing to the twelve o'clock positions. This will indicate the correct setting for your valve to function at the dialed setting indicated.


If rough valve is installed too far in the wall, we have an extension kit available. Please contact your dealer




Installation view

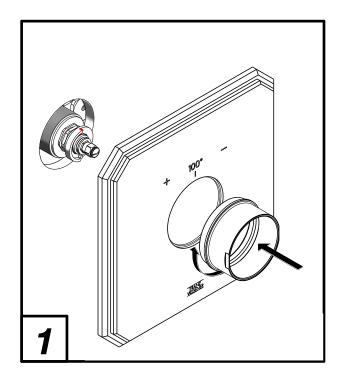

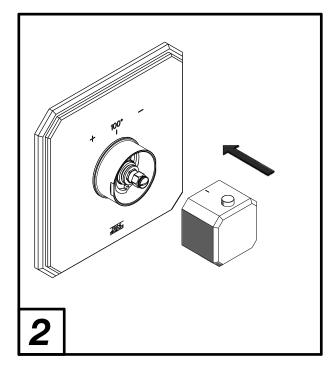

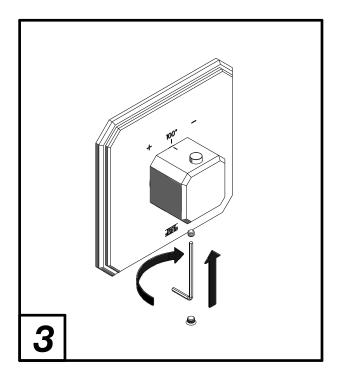

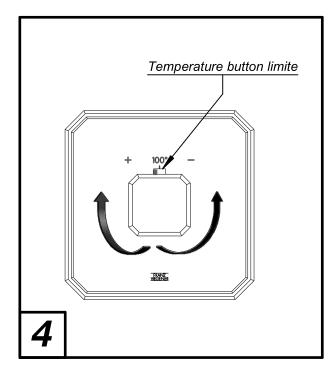





Notas	






Notas	





NOTAS	



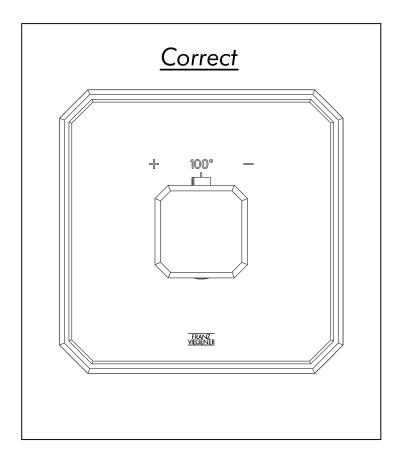

Cleaning and care instructions

It is recommended to wipe faucets dry with a soft cloth after use to avoid spots left by mineral deposits when water evaporates.

Avoid harsh and abrasive cleaners on all faucet surfaces.

Use only a soft damp cloth with mild liquid soap to clean the faucet surfaces of all finishes including coated polished brass, gold, pewter, etc.

Painted and plated surfaces alike, should be coated regularly with a thin protective film. Non-abrasive liquid car wax is recommended.

FRANZ VIEGENER a FV S.A. Company 4000 Porett Drive . Gurnee Illinois 60031 Phone 847-244-1234/Fax 847-244-1259